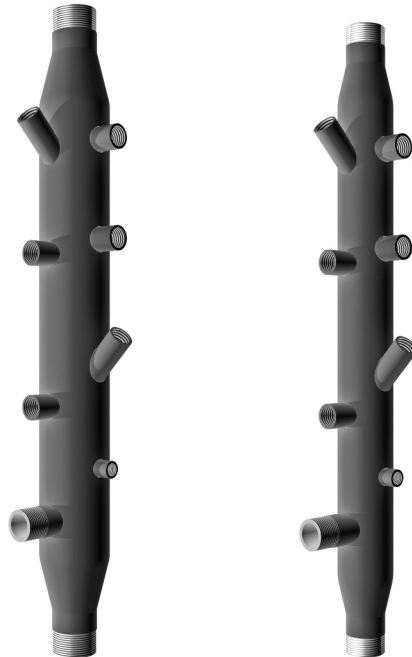


INAIL safety device holder

USE

The INAIL safety device and accessory holder (Ex ISPESEL) allows you to gather all the safety and control devices which must be installed in thermal power stations with a power above 35 kW.

Connection version: **G 1"1/2**Connection version: **G 1"1/4**

MODELS

INAIL safety device holders are available in the following versions:


- **THREADED MALE CONNECTION G 1"1/4** • central body \varnothing 2".
- **THREADED MALE CONNECTION G 1"1/2** • central body \varnothing 2"1/2".

Tools and safety devices are not included.

TECHNICAL FEATURES

- Material: carbon steel EN 10255;
- Paint: water-based primer, red;
- Maximum fluid temperature: 90°C;
- Maximum pressure 5 bar.

OVERALL SIZE

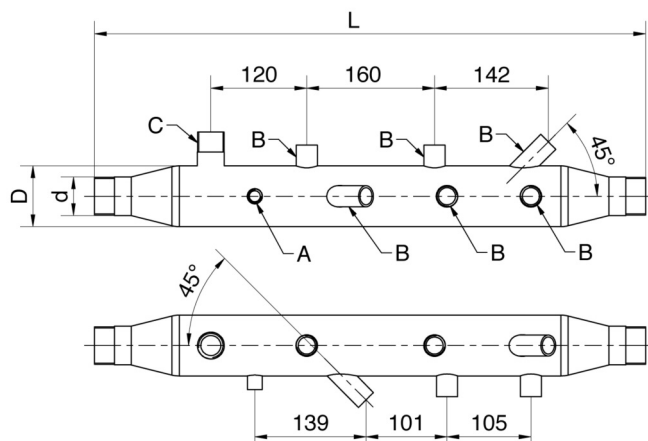


CODE	A	B	C	L	d	D
CPS114	1/4"	1/2"	1"	670	1"1/4	2"
CPS112	1/4"	1/2"	1"	690	1"1/2	2"1/2



COMPARATO NELLO SRL

UNI EN ISO 9001: CERTIFIED COMPANY 2015


INAIL safety device holder

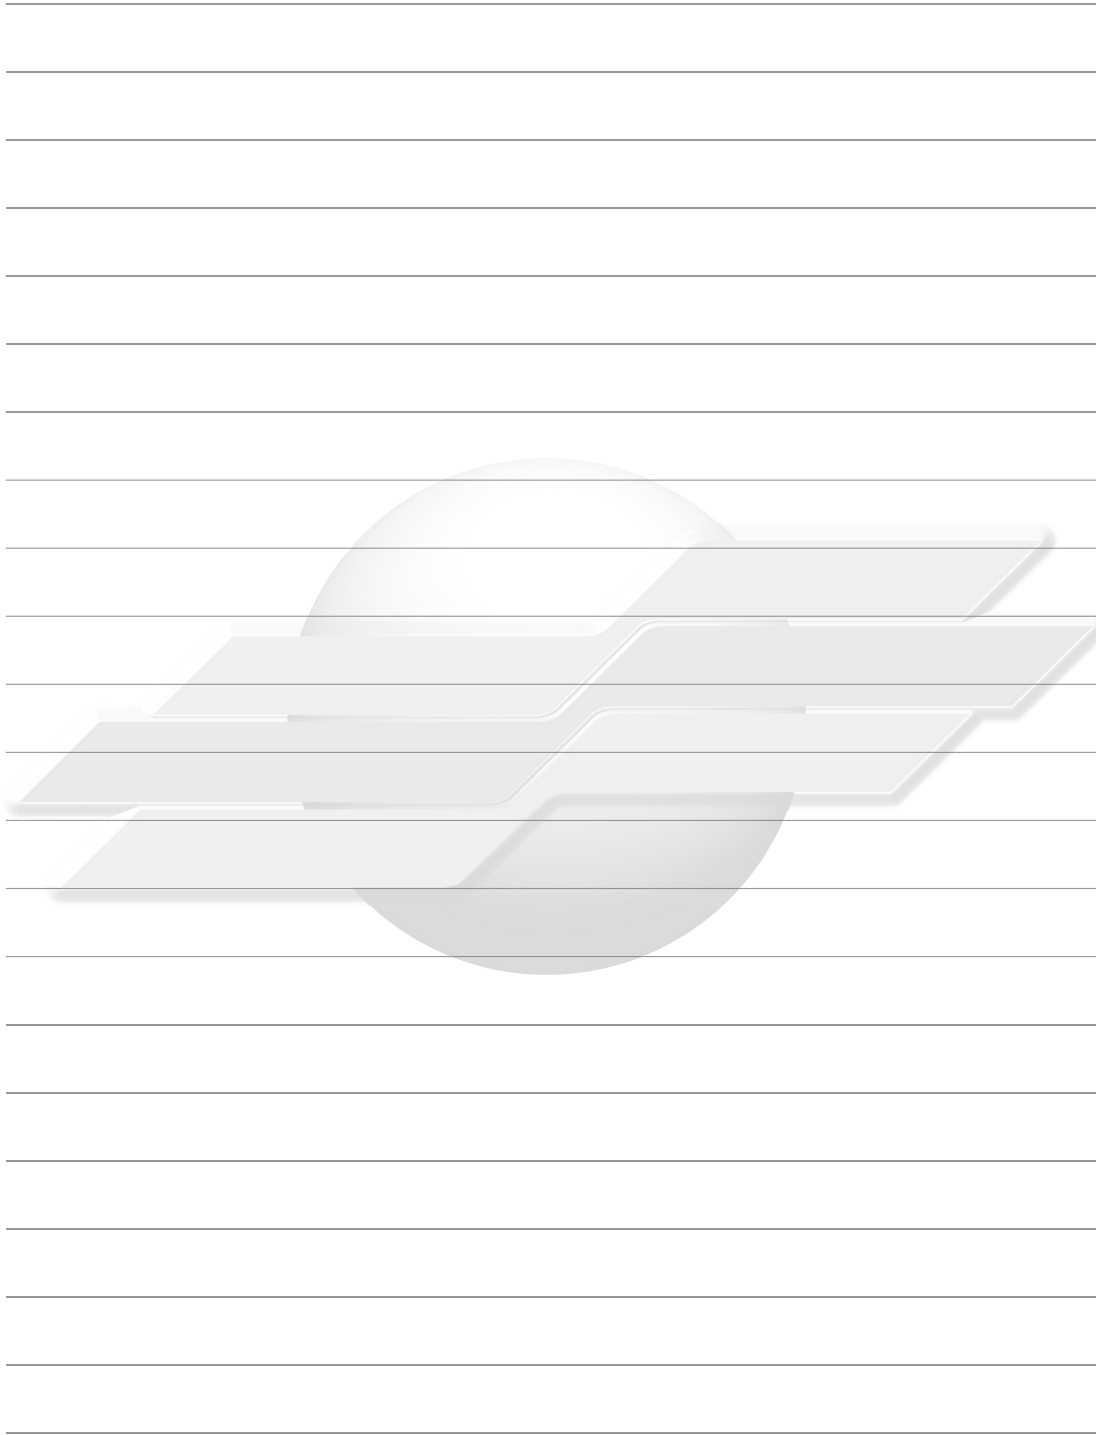

comparato.com

In order to provide an up-to-date service, Comparato Nello S.r.l. reserves the right to modify technical data, drawings, graphs and photos of this instruction manual at any time, without prior notice and photographs of this catalogue at any time and without prior notice.

UPDATED DATA SHEETS AVAILABLE AT www.comparato.com



**HYDROTHERMAL SYSTEMS
COMPARATO NELLO SRL**
17014 CAIRO MONTENOTTE (SV) ITALIA VIALE DELLA LIBERTÀ • LOCALITÀ FERRANIA • Tel. +39 019 510.371 - FAX +39 019 517.102

www.comparato.com e-mail: info@comparato.com

UNI EN ISO 9001: CERTIFIED COMPANY 2015