

# Deaerator

## USE

The **DEAERATOR** is specifically used for eliminating air in heating systems. It can be fitted with automatic release and manual release.





Tools and safety devices are not included.

## TECHNICAL FEATURES

- Material: carbon steel EN 10255;
- Paint: water-based primer, red;
- Maximum fluid temperature: 90°C;
- Maximum pressure 5 bar.


## OVERALL SIZE

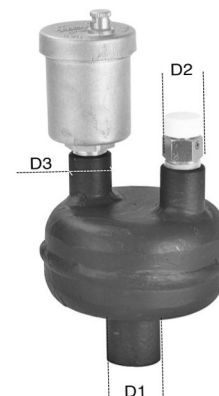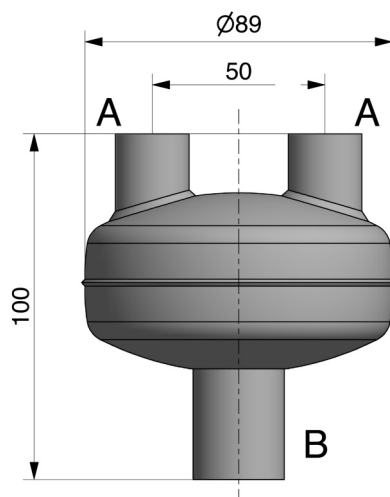

CODE	Ø D1	Ø D2	Ø D3
D1012	1/2"	3/8"	3/8"



# Deaerator

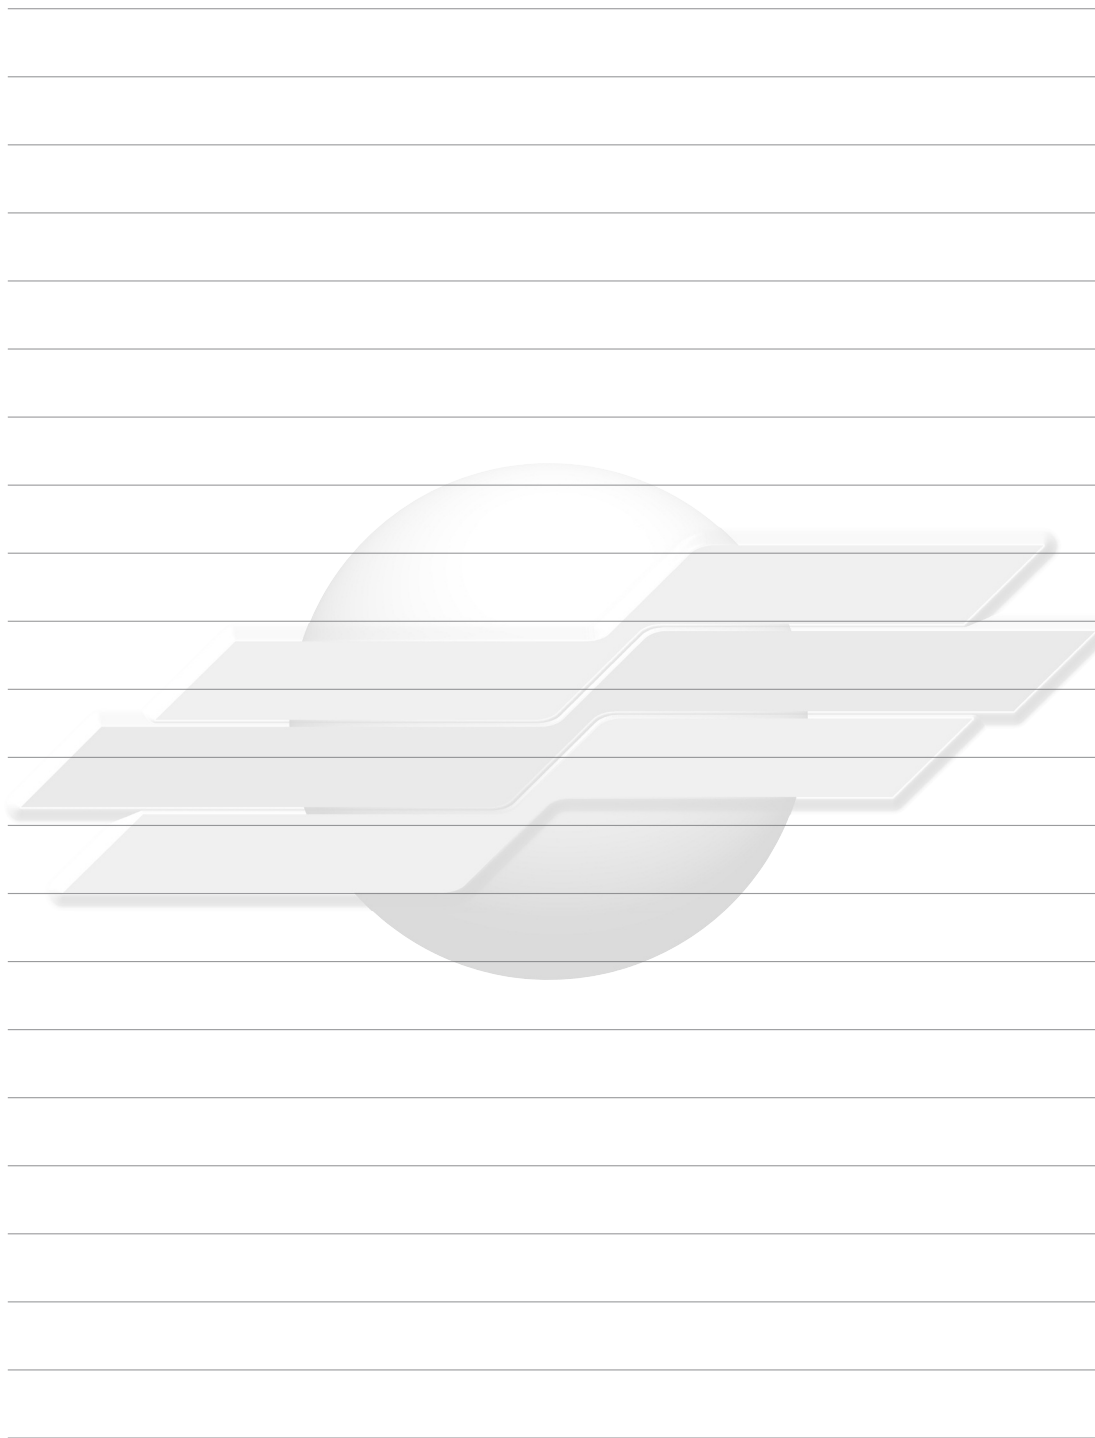

comparato.com

In order to provide an up-to-date service, Comparato Nello S.r.l. reserves the right to modify technical data, drawings, graphs and photos of this instruction manual at any time, without prior notice and photographs of this catalogue at any time and without prior notice.

UPDATED DATA SHEETS AVAILABLE AT [www.comparato.com](http://www.comparato.com)



**HYDROTHERMAL SYSTEMS**  
**COMPARATO NELLO SRL**  
17014 CAIRO MONTENOTTE (SV) ITALIA VIALE DELLA LIBERTÀ • LOCALITÀ FERRANIA • Tel. +39 019 510.371 - FAX +39 019 517.102

[www.comparato.com](http://www.comparato.com) e-mail: [info@comparato.com](mailto:info@comparato.com)

UNI EN ISO 9001: CERTIFIED COMPANY 2015